



DRYING

SINGLE POCKET DRYERS ADVANCE+ FD 135 TP2 PLUS



CHARACTERISTICS

TP2

- 7" touchscreen, user friendly and totally programmable.
- Videos on display, ads, instructions.
- Free software for programming, telemetry, data analysis.
- USB Connection.
- 37 Languages.
- 8 dosing signals.

OUTSTANDING FEATURES

- Reversing drum action is standard.
- Stainless steel drum is standard.
- Frequency inverter is standard.

EFFICIENCY

- Intelligent humidity control with drum inlet temperature control.
- Efficient air recirculation system.
- Complete air-flow circuit.
- Double door glass.
- Optimized system of mixed airflow.
- Large Lint filter.

VERSATILITY

- Make to order - customization.
- Wet Cleaning configuration.

CONNECTIVITY

- Standard IoT FagorKonnnect.
- Management of laundries: OPL and COIN.

ERGONOMICS

- Lint Filter Drawer, made of stainless steel.
- Large loading doors.

MAINTENANCE

- Hinged panel: easy and ergonomic access.
- Technical menu: statistics for technicians.

OTHERS


- Grey skin plate outer casing, stainless steel look.
- Integrated Fire Extinguishing System.
- Drum with stamped holes.
- Anti-wrinkle at the end of the cycle.
- Heating options: natural gas and propane.
- CE approved.

OPTIONS

- Automatic (double glass) or manual sliding door.
- Opposite door opening.
- Tropicalized model.
- Dosing/spraying system.
- Back panel external air + filter.
- Lint filter with grid 0,6mm (standard is 0,3mm).
- Lint filter with grid 1,2mm (standard is 0,3mm).
- Stainless steel front and side panels.
- Front panel in stainless steel.

CAPACITY		U	FD-135 TP2 PLUS
Capacity 1/18		Kg	66.7
		Lb	146.9
Capacity 1/20		Kg	60
		Lb	132.3
DRUM			
Ø Drum		mm	1225
		inch	48.23
Drum length		mm	1020
		inch	40.16
Drum volume		l cu	1200
		ft	42.37
Ø Door		mm	802
		inch	31.57
Floor to door center		mm	1275
		inch	50.2
Floor to lower part of the door		mm	813
		inch	31.99
Drum motor power		kW	1.1
ELECTRIC POWER			
Installed heating power		kW	72
Installed electrical power		kW	75.35
Evaporation capacity		l/h	64
		USgallon/h	16.91
Hourly output		Kg/h	128.6
		Lb/h	283.5
GAS POWER			
Installed heating power gas		Kcal/h	77386
		Btu/h	307092.7
Installed heating power gas		kW	90
Installed electrical power		kW	3.35
Instant propane gas consumption (G31)		Kg/h	7.71
		Lb/h	17
Instant natural gas consumption (G20)		m³/h	9.53
		cfm	5.61
Evaporation capacity		l/h	72
		USgallon/h	19.02
Hourly output Ø Gas inlet		Kg/h	144
		Lb/h	317.5
		BSPP ISO 228-1	3/4"
STEAM POWER			
Installed heating power steam		kW	128
		Btu/h	436754
Installed electrical power		kW	3.35
Steam consumption (8 barG) - Stándar		Kg/h	171
Steam consumption (116 psiG)		Lb/h	206
Steam pressure - Standard		barG	7 - 12
		psiG	101.5 - 177
Steam inlet - steam outlet - Standard		BSPT- ISO7.1	1"
Steam inlet - condensate outlet	NPT ANSI B1.20.1 Tapered		1"
Steam consumption (5 bagG) - Low pressure		Kg/h	147
Steam consumption (72,5 psiG) - Low pressure		Lb/h	177.1
Steam pressure - Low Pressure		barG	4 - 7
		psiG	58 - 101.5
Steam Inlet - Steam Outlet - Low Pressure		BSPT - ISO7.1	1" 1/2

THERMAL OIL			
Installed heating power	kW	128	
Installed electrical power	kW	3.35	
Fluid consumption (T max175°C)	m³/h	10 1"	
Connections thermal oil	BSP	1/2	
VENTILATION			
Nominal air flow	m³/h	4500	
	cfm	2648.6	
Air outlet Ø	mm	300	
	inch	11.81	
Fan motor power	kW	2.2	
HEAT DISSIPATION			
Total max heat dissipation	kW	5.04	
	Btu/h	17207.3	
Front pannel max heat dissipation	kW	1.44	
	Btu/h	4916.4	
CONNECTIONS		ELECTRICAL	GAS
Voltage 208-240/60/1~ + G		-	-
Voltage 230V /3~ + G		Nº x mm2 / A	4x10 / 25 A
Voltage 440-480V /3~ +G		Nº x mm2 / A	4x14/ 15 A
DIMENSIONS / PACKING DIMENSIONS			
Net width / Gross width	mm	1270 / 1330	
	inch	50 / 52.36	
Net depth / Gross depth	mm	1366 / 1455	
	inch	53.78 / 57.28	
Net height / Gross height	mm	2380 / 2200	
	inch	93.7 / 86.61	
Net weight / Gross weight	Kg	529 / 575	
	Lb	1166.25 / 1267.66	
OTHERS			
Sound level	dB	67	

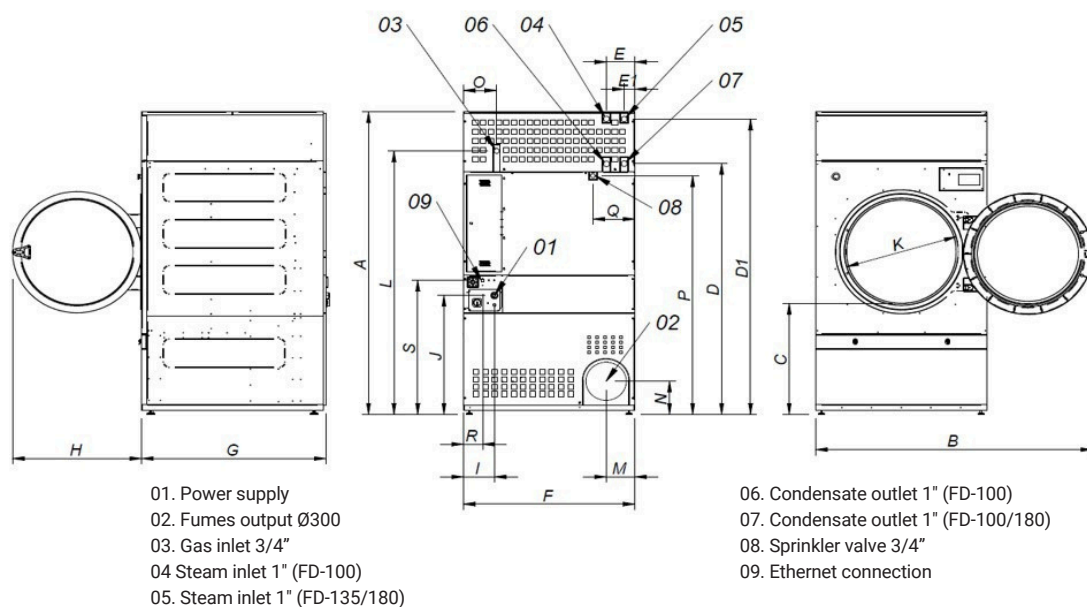

	A	B	C	D	D1	E	E1	F	G	H	I	J	K	L	M	N	O	P	Q	R	S
FD-135 TP2 PLUS	93.70	80.51	34.40	77.99	90.98	8.30	3.14	50	53.77	37.63	9.76	36.81	31.57	82.20	8.4	9.44	9.60	72.48	12.12	6.29	41.55