



DRYING

STACK DRYERS ECONOMIC LINE FED-2-50 MG

CHARACTERISTICS

M PROGRAMMER

- M programmer: push buttons to control temperature and time.

OUTSTANDING FEATURES

- Reversing drum action is standard.
- Frequency inverter is standard.
- Galvanized drum is standard.

VERSATILITY

- Make to order - customization.
- OPL > COIN - Standard OPL model easily transformable to coin laundry uses.

ERGONOMICS

- Lint Filter Drawer, stainless steel mesh.
- Large Loading Doors.

MAINTENANCE

- Hinged panel: easy and ergonomic access.
- Technical menu: statistics for technicians and maintenance with external console (with console option).

OTHERS


- COOL DOWN - anti-wrinkle at the end of the cycle.
- Heating options: natural gas and propane
- White panels
- CE approved.

OPTIONS

- M programmer display.
- Lint filter with grid 0,01 In (standard STACK is 0,02 In).



CAPACITY		
Capacity 1/18	U.	FED-2-50 MG
	Kg	24.3 x 2
Capacity 1/20	Lb	53.6 x 2
	Kg	21.9 x 2
	Lb	48.3 x 2
DRUM		
Ø Drum	mm	835
	inch	32.87
Drum length	mm	800
	inch	31.5
Drum volume	l cu	440
	ft	15.54
Ø Door	mm	575
	inch	22.64
Floor to door center	mm	574 / 1618
	inch	22.60 / 63.70
Floor to lower part of the door Drum	mm	214 / 1258
	inch	8.46/49.53
motor power	kW	0.37 x 2
GAS POWER		
Installed heating power gas	kcal/h	26139 x 2
	Btu/h	103658.5 x 2
Installed heating power gas	kW	30.4 x 2
Installed electrical power	Kw	1.94
Instant propane gas consumption (G31)	Kg/h	2.61 x 2
	Lb/h	5.75 x 2
Instant natural gas consumption (G20)	m³/h	3.22 x 2
	cfm	1.89 x 2
Evaporation capacity	l/h	44
	USgallon/h	11.624
Hourly output Ø	Kg/h	88
	Lb/h	194
Gas inlet	BSPP ISO 228-1	3/4"
VENTILATION		
Nominal air flow	m³/h	900 x 2
	cfm	529.72 x 2
Air outlet Ø	mm	250
	inch	10
Fan motor power	kW	0.55 x 2
HEAT DISSIPATION		
Total max heat dissipation	kW	2.6
	Btu/h	8876.8
Front pannel max heat dissipation	kW	1.9
	Btu/h	6486.9
CONNECTIONS		
Voltage 120/60/1~ I + G	Nº x AWG / A	3 X 10 / 30 A
Voltage 230V - 3~ + G	-	-
Voltage 480V - 3~ + G	-	-
DIMENSIONS / PACKING DIMENSIONS		
Net width / Gross width	mm	870 / 950
	inch	34.25 / 37.4
Net depth / Gross depth	mm	1312 / 1395
	inch	51.65 / 54.92
Net height / Gross height	mm	2118 / 2250
	inch	83.39 / 88.58
Net weight / Gross weight	Kg	373.5 / 388.5
	Lb	823.43 / 856.50
OTHERS		
Sound level	dB	64

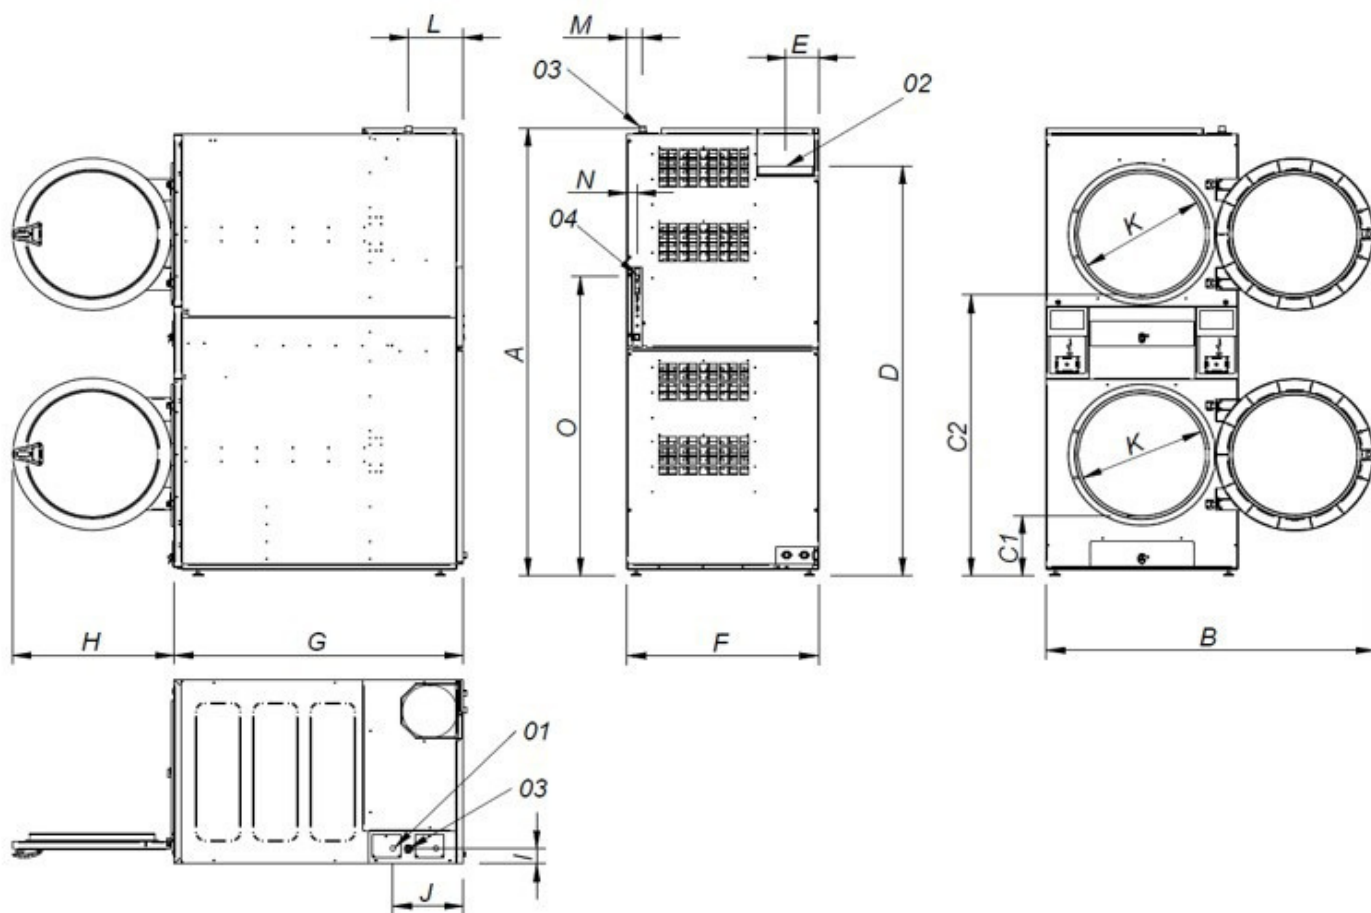

- 01. Power supply
- 02. Fumes output 10"
- 03. 2 Sprinkler valves 3/4"
- 04. Ethernet connection (Only control Touch)

	A	B	C1	C2	D	E	F	G	H	I	J	K	L	M	N	O
FED-2-50 MG	83.38	56.66	11.25	52.36	76.37	5.84	34.25	51.65	28.93	2.87	12.59	22.63	9.84	2.75	1.77	55.74