



WASHING

HIGH SPIN WASHERS HIGH CAPACITY FWH-135C TP2

FEATURES

Touch Plus Control

- 7" touchscreen, user friendly and totally programmable .
- Videos on display, ads, instructions.
- Free software for programming, telemetry, data analysis.
- USB Connection.
- 37 languages.
- 8 dosing signals as standard.

G FACTOR

- High G-Factor 450.

EFFICIENCY

- Energy Optimization.
- Optimal load.
- Low water consumption.

VERSATILITY

- Electric or Hot water.
- WET CLEANING features as standard.

CONNECTIVITY

- IoT - Fagor-Konnect standard.
- Remote technical service.
- Laundry Management system: OPL

ERGONOMICS

- Big door diameter: Ø 560 mm.
- Easy opening/closing system for door lock.

MAINTENANCE

- Equivalent parts for all models: contactors, electronic devices, gear.
- Technical menu: traceability, error diagnosis.

OTHERS

- Drum and outer tub in stainless steel AISI 304.
- 3 water inlets.
- Soft mounted, free standing washers.
- Panels in skin plate.
- Easy to install, no need of fixation to the floor.
- CB and WRAS approved product. Option ETL.
- High spin washers with suspended drum.


OPTIONS

- DQ-2 Dosing pump kit.
- Extra dosing pump DB-1.
- Double drain.
- Tropicalized coating.
- Tilting options: frontal or double tilt.
- Automatic weighing sensor system on feet (Not available with tilting kits).
- Relay card with 6 extra dosing signals: up to 14 signals.
- Stainless steel AISI 304 outer casing.
- Double heating E+S.



DRUM		U.	FWH - 135C TP2	
Load capacity	1:9 / 1:10	Lb.	143.3/130.1	
Volume		CU.FT	20.8	
Diameter		In	41.3	
Depth		In	26.8	
GENERAL DETAILS				
Washing speed / Spinning speed		r.p.m.	38 / 875	
G Factor		-	450	
Maximum force transmitted		KN	18 ±4.2	
Frequency-dynamic force		Hz	12,66	
Noise level		dB	< 70	
Coin laundry version		-	No	
Double drain		-	Opt.	
Weighing System / Tilting System		-	Opt.	
SLUICE option		-	No	
DOOR				
Height center door / Height door		In	46.1 / 31.9	
Diameter		In	22.1	
POWER				
Motor		Hp	20.1	
Electric heating power		kW	36	
Total electric power (electric model)		kW	39	
Total electric power (hw, steam model)		kW	15	
CONNECTIONS			ELECTRIC	STEAM / HOT WATER
Voltage 208-240/60/1~ + G	Nº x AWG / A		-	-
Voltage 230/3~ + G	Nº x AWG / A		4 x 2 / 125A	4 x 8 / 50A
Voltage 440-480/3 ~ + G	Nº x AWG / A		4 x 4 / 90A	4 x 10 / 30A
Steam inlet (Steam model)	inch		3/4"	
Maximum steam consumption (Steam model)	lbs/h		21	
Water inlet	inch		1"	
Water main pressure	Kg/cm2		2-4	
Maximum water consumption	Gal/h		157.9	
Drain	mm/inch		3"	
Drainage capacity	Gal/min		52.8	
DIMENSIONS / PACKING DIMENSIONS				
Net Width / Gross Width	In		55.91 / 63	
Net Depth / Gross Depth	In		56.42 / 62.8	
Net Height / Gross Height	In		74.41 / 76	
Net weight / Gross weight	Lbs.		3206 / 3405	
Volume	Ft3		173	

* Programmed No. 2, 100% load

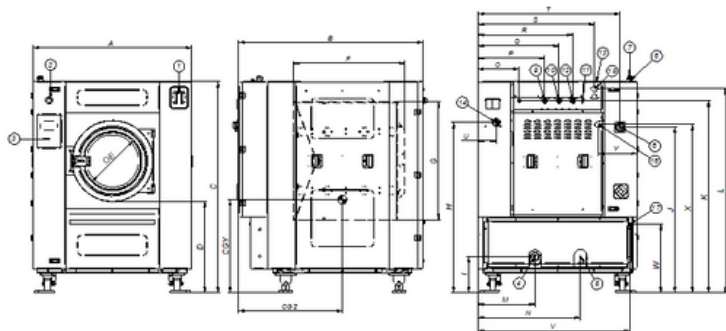

- 01. Soap dispenser
- 02. Emergency stop
- 03. USB port
- 04. Drain 1
- 05. Drain 2
- 06. Electric connection to liquid soap pump
- 07. Electrical connection
- 08. Main switch connection to liquid soap pump
- 09. Auxiliary water inlet
- 10. Hot water inlet
- 11. Equipotential connection
- 12. Cold water inlet
- 13. Steam output
- 14. Liquid soap connection
- 15. Steam connection
- 16. Air intake
- 17. Ethernet port

		A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ
FWH-135C	mm	1420	1433	1890	810	560	760	1050	1563	323	1475	1710	1817	508	912	367	595	720	845	1040	1267	160	1353	608	1500	348	830	820
	In	55.91	56.42	74.41	31.89	22.05	38.27	41.34	61.54	12.72	58.07	67.32	71.54	20.00	35.91	14.45	23.43	28.35	33.27	40.94	49.88	6.30	53.27	23.94	59.06	13.70	32.68	32.28