



WASHING

HIGH SPIN WASHERS HIGH CAPACITY FWH-230C TP2

FEATURES

Touch Plus Control

- 7" touchscreen, user friendly and totally programmable .
- Videos on display, ads, instructions. Free software for programming, telemetry, data analysis.
- USB Connection.
- 37 languages.
- 8 dosing signals as standard.

G FACTOR

- High G-FACTOR 350.

EFFICIENCY

- Intelligent consumption.
- Optimal loading.
- Low water consumption.

VERSATILITY

- Electric or Hot water.
- WET CLEANING features as standard.

CONNECTIVITY

- IoT - Fagor-Konnect standard.
- Remote technical service.
- Laundry Management system: OPL

ERGONOMICS

- Biggest door diameter: Ø700.
- Easy opening/closing system for door lock.

MAINTENANCE

- Equivalent parts for all models: contactors, electronic devices, gear.
- Technical menu: traceability, error diagnosis.

OTHERS

- Drum and outer tub in stainless steel AISI 304.
- 3 water inlets.
- Air inlet.
- Soft mounted, free standing washers.
- Panels in skin plate.
- Easy to install, no need of fixation to the floor.
- CB and WRAS approved product. Option ETL.
- High spin washers with suspended drum.


OPTIONS

- DQ-2 Dosing pump kit.
- Extra dosing pump DB-1.
- Double drain.
- Tropicalized coating.
- Tilting options: frontal or double tilt.
- Automatic weighing sensor system on feet (Not available with tilting kits).
- Relay card with 6 extra dosing signals: up to 14 signals.
- Stainless steel AISI 304 outer casing.
- Double heating E+S.



DRUM		U.	FWH - 230C TP2
Load capacity 1:9 / 1:10	Lb.	105/95	
Volume	CU.FT	950	
Diameter	In	1360	
Depth	In	637	
GENERAL DETAILS			
Washing speed / Spinning speed	r.p.m.	34 / 678	
G Factor	-	350	
Maximum force transmitted	KN	37.77 ±5.25	
Frequency-dynamic force	Hz	11.33	
Noise level	dB	<70	
Coin laundry version	-	No	
Double drain	-	Opt.	
Weighing System / Tilting System	-	Opt.	
SLUICE option	-	No	
DOOR			
Height center door / Height door	In	52.4/35.5	
Diameter	In	27.6	
POWER			
Motor	Hp	20.1	
Electric heating power	kW	-	
Total electric power (electric model)	kW	-	
Total electric power (hw, steam model)	kW	15	
CONNECTIONS		STEAM / HOT WATER	
Voltage 208-240/60/3~ + G	N° x AWG / A	4 x 6 / 70A	
Voltage 440-480/3 ~ + G	N° x AWG / A	4 x 8 / 45A	
Steam inlet (Steam model)	inch	1-1/4"	
Maximum steam consumption (Steam model)	lbs/h	26.5	
Water inlet	inch	1-1/2"	
Water main pressure	Kg/cm2	2-4	
Maximum water consumption	Gal/h	279.3	
Air inlet	Kg/cm2	4	
Drain	mm/inch	4"	
Drainage capacity	Gal/min	132	
DIMENSIONS / PACKING DIMENSIONS			
Net Width / Gross Width	In	72.28/76.4	
Net Depth / Gross Depth	In	67.32/80	
Net Height / Gross Height	In	88.39/90.2	
Net weight / Gross weight	Lbs.	5071.5/5733	
Volume	Ft3	317.8	

* Programmed No. 2, 100% load

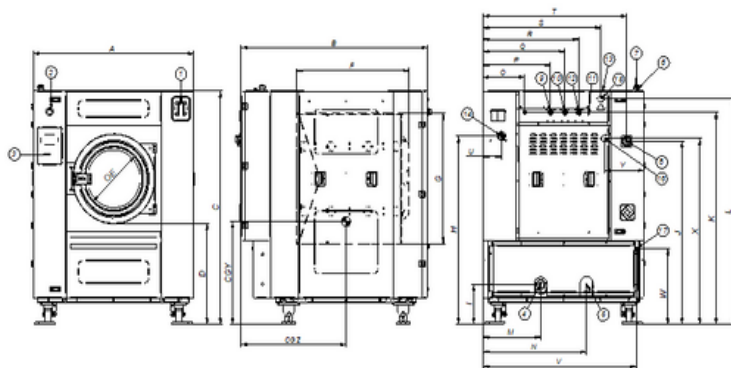

- | | |
|---|------------------------------|
| 31. Soap dispenser | 09. Auxiliary water inlet |
| 32. Emergency stop | 10. Hot water inlet |
| 33. USB port | 11. Equipotential connection |
| 34. Drain 1 | 12. Cold water inlet |
| 35. Drain 2 | 13. Steam output |
| 36. Electric connection to liquid soap pump | 14. Liquid soap connection |
| 37. Electrical connection | 15. Steam connection |
| 38. Main switch | 16. Air intake |
| | 17. Ethernet port |

		A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	Y	Z	CGY	CGZ
FWH-230C	mm	1836	1710	2245	945	700	792	1350	1740	336	1781	2038	2110	1095	1092	494	634	774	954	994	1239	1646	165	2049	2050	717	853	1025
	In	72.28	67.32	88.39	37.20	27.56	31.18	53.15	68.50	13.23	70.12	80.24	83.07	43.11	42.99	19.45	24.96	30.47	37.56	39.13	48.78	64.80	6.50	80.67	80.71	28.23	33.58	40.35