



WASHING



HIGH SPIN WASHERS HIGH CAPACITY FWH-275C TP2

FEATURES

Touch Plus Control

- 7" touchscreen, user friendly and totally programmable .
- Videos on display, ads, instructions.
- Free software for programming, telemetry, data analysis.
- USB Connection.
- 37 languages.
- 8 dosing signals as standard.

G FACTOR

- High G-FACTOR 350.

EFFICIENCY

- Intelligent consumption.
- Optimal loading.
- Low water consumption.

VERSATILITY

- Electric or Hot water.
- WET CLEANING features as standard.

CONNECTIVITY

- IoT - Fagor-Konnect standard.
- Remote technical service.
- Laundry Management system: OPL

ERGONOMICS

- Biggest door diameter: Ø700.
- Easy opening/closing system for door lock.

MAINTENANCE

- Equivalent parts for all models: contactors, electronic devices, gear.
- Technical menu: traceability, error diagnosis.

OTHERS

- Drum and tub in stainless steel AISI 304.
- 3 water inlets.
- Air inlet.
- Soft mounted, free standing washers.
- Panels in skinplate.
- Easy to install, no need of fixation to the floor.
- CB and WRAS approved product. Option ETL.
- High spin washers with suspended drum.


OPTIONS

- DQ-2 Dosing pump kit.
- Extra dosing pump DB-1.
- Double drain.
- Tropicalized coating.
- Tilting options: frontal or double tilt.
- Automatic weighing sensor system on feet (Not available with tilting kits).
- Relay card with 6 extra dosing signals: up to 14 signals.
- Stainless steel AISI 304 outer casing.
- Double heating E+S.



DRUM		U.	FWH - 275C TP2
Load capacity 1:9 / 1:10		Lb.	286.7/253.6
Volume		CU.FT	40.6
Diameter		In	53.6
Depth		In	30
GENERAL DETAILS			
Washing speed / Spinning speed		r.p.m.	34 / 678
G Factor		-	350
Maximum force transmitted		KN	37.77 ±5.25
Frequency-dynamic force		Hz	11.33
Noise level		dB	<70
Coin laundry version		-	No
Double drain		-	Opt.
Weighing System / Tilting System		-	Opt.
SLUICE option		-	No
DOOR			
Height center door / Height door		In	52.4/35.5
Diameter		In	27.6
POWER			
Motor		Hp	15
Electric heating power		kW	-
Total electric power (electric model)		kW	-
Total electric power (hw, steam model)		kW	15
CONNECTIONS			
Voltage 208-240/60/3~ + G		Nº x AWG / A	4 x 6 / 70A
Voltage 440-480/3 ~ + G		Nº x AWG / A	4 x 8 / 45A
Steam inlet (Steam model)		inch	1-1/4"
Maximum steam consumption (Steam model)		lbs/h	26.5
Water inlet		inch	1-1/2"
Water main pressure		Kg/cm2	2-4
Maximum water consumption		Gal/h	331.1**
Air inlet		Kg/cm2	4
Drain		mm/inch	4"
Drainage capacity		Gal/min	132
DIMENSIONS / PACKING DIMENSIONS			
Net Width / Gross Width		In	72.28/76.4
Net Depth / Gross Depth		In	72.13/80
Net Height / Gross Height		In	88.39/90.2
Net weight / Gross weight		Lbs.	6090/6743
Volume		Ft3	317.8

* Programmed No. 2, 100% load

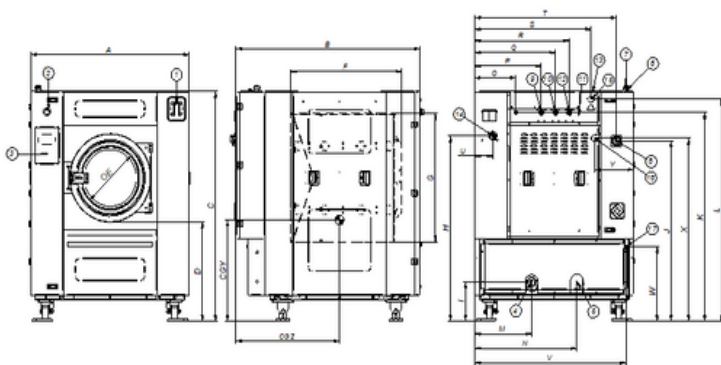

- . Soap dispenser
- . Emergency stop
- . USB port
- . Drain 1
- . Drain 2
- . Electric connection to liquid soap mp
- . Electrical connection
- . Main switch

- 09. Auxiliary water inlet
- 10. Hot water inlet
- 11. Equipotential connection
- 12. Cold water inlet
- 13. Steam output
- 14. Liquid soap connection
- 15. Steam connection
- 16. Air intake
- 17. Ethernet port

		A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	Y	Z	CGY	CGZ
FWH-275C	mm	1836	1832	2245	945	700	930	1350	1740	336	1781	2038	2110	1095	1092	494	634	774	954	994	1239	1646	165	2049	2050	717	853	1130
	In	72.28	72.13	88.39	37.20	27.56	36.61	53.15	68.50	13.23	70.12	80.24	83.07	43.11	42.99	19.45	24.96	30.47	37.56	39.13	48.78	64.80	6.50	80.67	80.71	28.23	33.58	44.49