



WASHING



HIGH SPIN WASHERS LOW AND MEDIUM CAPACITY FWH-30 TP2



FEATURES

Touch Plus Control

- 7" touchscreen, user friendly and totally programmable .
- Videos on display, ads, instructions.
- Free software for programming, telemetry, data analysis.
- USB Connection.
- 37 languages.
- 8 dosing signals as standard.

G FACTOR

- High Spin Up to 500 G Force

EFFICIENCY

- Energy Optimization.
- Optimal load.
- KRS: Water Recovery tank ready.
- Low water consumption.

VERSATILITY

- Custom - Make to order
- OPL or COIN.
- Electric or Hot water.
- Drain valve or Pump.
- Wet cleaning features.

CONNECTIVITY

- IoT - Fagor-Konnect standard.
- Remote technical service.
- Laundry Management system: OPL and COIN.

ERGONOMICS

- Biggest door diameter: Ø373.
- Easy opening/closing system for door lock.

MAINTENANCE

- Hinged panel: easy and ergonomic access.
- Technical setting: telemetry, error diagnosis, monitoring, software updates.
- Easy maintenance with external console (optional)

OTHERS


- Grey skin plate outer casing.
- Drum and outer tub in stainless steel AISI 304.
- Detergent dispenser with 4 compartments.
- Electronic control of imbalance with frequency control.
- LOADING AID system: water and rotation control.
- CB and WRAS approved product. Option ETL.
- High spin washers with suspended drum.

OPTIONS

- DQ-2 Dosing pump kit.
- Extra dosing pump DB-1.
- Double drain.
- Drain pump for models FWH-25 and FWH-30.
- Water FULL FLOW recirculation of bath water.
- Levelling pads.
- Automatic weighing sensor system on feet (Includes kit with 6 extra dosing signals).
- Relay card with 6 extra dosing signals: up to 14 signals.
- Silicone gasket.
- Reversible door opening.
- Tropicalized coating.
- Steam kit to transform an E or HW heated machine into steam version.
- Plinth for washing mops.
- Plinth to level all machines from top.
- Plinth to align the door base at 33.46 In.
- Stainless steel AISI 304 outer casing.
- Stainless steel AISI 304 front panel.
- Coin/token kits.
- Auto unlock kit for the door.

DRUM		U.	FWH - 30 TP2	
Load capacity 1:9 / 1:10		Lb.	30.9/28.7	
Volume		CU.FT	4.6	
Diameter		In	24.4	
Depth		In	16.9	
GENERAL DETAILS				
Washing speed / Spinning speed		r.p.m.	50/1204	
G Factor		-	500	
Maximum force transmitted		KN	2.49 ±1.05	
Frequency-dynamic force		Hz	16.7	
Noise level		dB	<70	
Coin laundry version		-	Yes	
Double drain		-	Opt.	
Weighing System / Tilting System		-	Opt./No	
SLUICE option		-	No	
DOOR				
Height center door / Height door		In	27.6/17.3	
Diameter		In	14.7	
POWER				
Motor		Hp	1.5	
Electric heating power		kW	9	
Total electric power (electric model)		kW	9.4	
Total electric power (hw, steam model)		kW	1.1	
CONNECTIONS			ELECTRIC	STEAM / HOT WATER
Voltage 208-240/60/1~ + G	N° x AWG / A		3 x 6 / 50A	3x 14 / 15A
Voltage 208-240/60/3~ + G	N° x AWG / A		4 x 10 / 32A	-
Voltage 440-480/3 ~ + G	N° x AWG / A		4 x 12 / 20A	-
Steam inlet (Steam model)	inch		1/2"	
Maximum steam consumption (Steam model)	Kg/h		8,5	
Water inlet	mm/inch		3/4"	
Water main pressure	Kg/cm2		2-4	
Maximum water consumption	Gal/h		23.4*	
Drain	mm/inch		3"	
Drainage capacity	Gal/min		58.1	
DIMENSIONS / PACKING DIMENSIONS				
Net Width / Gross Width	In		31.02/33.5	
Net Depth / Gross Depth	In		34.2140	
Net Height / Gross Height	In		51.46/63	
Net weight / Gross weight	Lbs.		520.4/605.3	
Volume	Ft3		48.7	

* Programme No. 20, 75% load

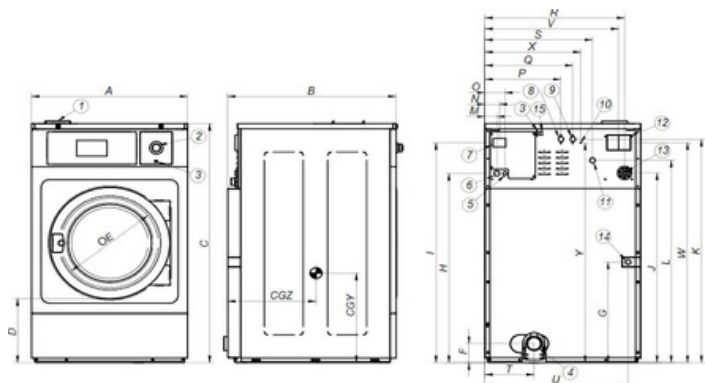

- 01. Soap dispenser
- 02. Emergency stop
- 03. USB port
- 04. Drain
- 05. Electric connection to liquid soap pump
- 06. Electrical connection
- 07. Main switch

- 08. Auxiliary water inlet
- 09. Hot water inlet
- 10. Equipotential connection
- 11. Cold water inlet
- 12. Blur output / Water overload
- 13. Liquid soap connection
- 14. Steam connection
- 15. Ethernet port

		A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ
FWH-30	mm	788	869	1307	440	373	125	385	1034	1202	1037	1221	1106	61	74	101	385	445	706	544	243	718	676	1202	485	1201	450	651
	In	31.02	34.21	51.46	17.32	14.69	4.92	15.16	40.71	47.32	40.83	48.07	43.54	2.40	2.91	3.98	15.16	17.52	27.80	21.42	9.57	28.27	26.61	47.32	19.09	47.28	17.72	25.63