



WASHING

HIGH SPIN WASHERS LOW AND MEDIUM CAPACITY FWH-40 TP2

FEATURES

Touch Plus Control

- 7" touchscreen, user friendly and totally programmable .
- Videos on display, ads, instructions.
- Free software for programming, telemetry, data analysis.
- USB Connection.
- 37 languages.
- 8 dosing signals as standard.

G FACTOR

- High Spin Up to 500 G Force

EFFICIENCY

- Energy Optimization.
- Optimal load.
- KRS: Water Recovery tank ready.
- Low water consumption.

VERSATILITY

- Custom - Make to order
- OPL or COIN.
- Electric or Hot water.
- Drain valve or Pump.
- Wet cleaning features.

CONNECTIVITY

- IoT - Fagor-Konnect standard.
- Remote technical service.
- Laundry Management system: OPL and COIN.

ERGONOMICS

- Biggest door diameter: Ø460.
- Easy opening/closing system for door lock.

MAINTENANCE

- Hinged panel: easy and ergonomic access.
 - Technical setting: telemetry, error diagnosis, monitoring, software updates.
- Easy maintenance with external console (optional)

OTHERS

- Grey skin plate outer casing.
- Drum and outer tub in stainless steel AISI 304.
- Detergent dispenser with 4 compartments.
- LOADING AID system: water and rotation control.
- CB and WRAS approved product. Option ETL.
- High spin washers with suspended drum.


OPTIONS

- DQ-2 Dosing pump kit.
- Extra dosing pump DB-1.
- Double drain.
- Water FULL FLOW recirculation of bath water.
- Levelling pads.
- Automatic weighing sensor system on feet (Includes kit with 6 extra dosing signals).
- Relay card with 6 extra dosing signals: up to 14 signals.
- Silicone gasket.
- Reversible door opening.
- Tropicalized coating.
- Steam kit to transform an E or HW heated machine into steam version.
- Plinth to level all machines from top.
- Plinth to align the door base at 33.46 In.
- Plinth for washing mops.
- Stainless steel outer casing.
- Stainless steel front panel.
- Coin/token kit.
- Auto unlock kit for the door.



DRUM		U.	FWH - 40 TP2	
Load capacity	1:9 / 1:10	Lb.	44.1/39.7	
Volume		CU.FT	6.4	
Diameter		In	27.6	
Depth		In	18.5	
GENERAL DETAILS				
Washing speed / Spinning speed		r.p.m.	47/1133	
G Factor		-	500	
Maximum force transmitted		KN	3.41 ±1.4	
Frequency-dynamic force		Hz	16	
Noise level		dB	<70	
Coin laundry version		-	Yes	
Double drain		-	Opt.	
Weighing System / Tilting System		-	Opt./No	
SLUICE option		-	No	
DOOR				
Height center door / Height door		In	30.1/17.7	
Diameter		In	18.1	
POWER				
Motor		Hp	3	
Electric heating power		kW	12	
Total electric power (electric model)		kW	12.75	
Total electric power (hw, steam model)		kW	2.2	
CONNECTIONS			ELECTRIC	STEAM / HOT WATER
Voltage 208-240/60/1~ + G	N° x AWG / A		3 x 10 / 70A	3 x 14 / 15A
Voltage 208-240/60/3~ + G	N° x AWG / A		4 x 8 / 40A	-
Voltage 440-480/3 ~ + G	N° x AWG / A		4 x 10 / 30A	-
Steam inlet (Steam model)	inch		1/2"	
Maximum steam consumption (Steam model)	Kg/h		12	
Water inlet	mm/inch		3/4"	
Water main pressure	Kg/cm2		2-4	
Maximum water consumption	Gal/h		31.2*	
Drain	mm/inch		3"	
Drainage capacity	Gal/min		52.8	
DIMENSIONS / PACKING DIMENSIONS				
Net Width / Gross Width	In		34.80/37.2	
Net Depth / Gross Depth	In		35.94/40.6	
Net Height / Gross Height	In		55.31/ 66.2	
Net weight / Gross weight	Lbs.		756.6/855.5	
Volume	Ft3		57.6	

* Programme No. 20, 75% load

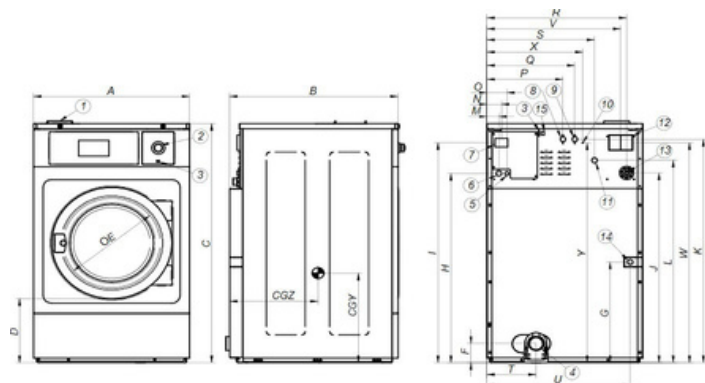

- 01. Soap dispenser
- 02. Emergency stop
- 03. USB port
- 04. Drain
- 05. Electric connection to liquid soap pump
- 06. Electrical connection
- 07. Main switch

- 08. Auxiliary water inlet
- 09. Hot water inlet
- 10. Equipotential connection
- 11. Cold water inlet
- 12. Blur output / Water overload
- 13. Liquid soap connection
- 14. Steam connection
- 15. Ethernet port

		A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ
FWH-40	mm	884	913	1.405	450	460	125	380	1135	1303	1138	1322	1207	61	74	101	429	509	802	640	322	814	772	1303	569	1.297	464	747
	In	34.80	35.94	55.31	17.02	18.11	30.74	14.96	44.68	51.30	44.80	52.05	47.52	2.40	2.91	3.98	16.89	20.04	31.57	25.20	12.68	32.05	30.39	51.30	22.40	51.06	18.27	29.41